



Breathing Air Filtration and Accessories

Y Piece to connect two hoses to one outlet.

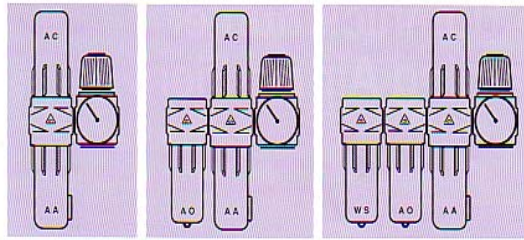

Model	Replacement element			
BA21BO	K009AA			K006AC
BA41BO	K017AA			K013AC
BA22BO	K009AO	K009AA	K006AC	
BA42BO	K017AO	K017AA	K013AC	
BA23BO	K009AO	K009AA	K006AC	
BA43BO	K017AO	K017AA	K013AC	

BA MODEL	no of persons	2 stage filter (AA/AC)	3rd stage filter (AO)	water separator (WS)	regulator	gauge	inlet/outlet port	male thread inlet nipple	male thread outlet coupling	wall mtg bracket	carry frame
BA21OO	1-2	✓					1/4	✓	✓		
BA21BO	1-2	✓			✓	✓	1/4	✓	✓	✓	
BA22BO	1-2	✓	✓		✓	✓	1/4	✓	✓	✓	✓
BA23BO	1-2	✓	✓	✓	✓	✓	1/4	✓	✓	✓	✓
BA21BP	1-2	✓			✓	✓	1/4	✓	✓		✓
BA22BP	1-2	✓	✓		✓	✓	1/4	✓	✓		✓
BA23BP	1-2	✓	✓	✓	✓	✓	1/4	✓	✓		✓
BA41OO	2-4	✓					3/8	✓	2		
BA41BO	2-4	✓			✓	✓	3/8	✓	2	✓	✓
BA43BO	2-4	✓	✓	✓	✓	✓	3/8	✓	2	✓	✓
BA41BP	2-4	✓			✓	✓	3/8	✓	2		✓
BA42BP	2-4	✓	✓		✓	✓	3/8	✓	2		✓
BA43BP	2-4	✓	✓	✓	✓	✓	3/8	✓	2		✓
BA43R2	2-4	✓	✓	✓	2	2	3/8	✓	2		✓

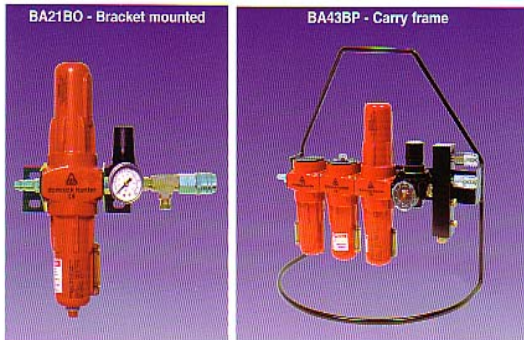

domnick
hunter
Breathing
Air Purifiers ...

... 1,000,000
times
cleaner
than the
air we
breathe.



Breathing Air Hose 10mm.

•Non kink •Non toxic •Complete with 'Cejn' nipple & coupling.

ORDER CODES

BAH10 10 metres long.

BAH15 15 metres long.

BAH20 20 metres long.

Other sizes available on application.

domnick hunter Breathing Air Purifiers ...

Alacrom aluminium treatment
Corrosion treatment
Inside and out
Epoxy paint finish is baked on to give extra long life.

Die-cast filter housings
Guaranteed for 10 years (8yr under normal recommended use).

domnick hunter
World class products specially designed for Breathing Air applications.

1st Stage Filter
Eradicates AA element, high efficiency filtration for the removal of particles down to 0.01 micron including water and oil aerosols, providing a maximum remaining oil aerosol content of 0.01 mg/m³ @ 21°C.

High Efficiency Filter Elements
All types
Plastic 17" deep seal
Chemical Resistance
Tough construction
and easy removal of the seal
compressed air
with 100% moisture
Does not die with minimum energy costs.
High Efficiency
Air is pre-treated by
pre-wash and water carry over
and is compatible with
resin or carbon elements.
Maximum strength
inner and outer elements that
resist impact and be cut
through down to 100 ton force.

2nd Stage filter
Replaceable activated carbon element for the removal of oil vapour and hydrocarbon exhausts giving a maximum remaining oil content of < 0.003mg/m³ @ 21°C.

Genuine domnick hunter
replaceable filter element offering highest efficiency lowest pressure drop.

Sight glass
gives a visual check of liquid collection and drain function.

Automatic drain valve
to remove condensate.

... 1,000,000 times cleaner than the air we breathe.

6 sizes available from 1 person to 30

Inlet

Outlet
BSP ports
G1/2, G1/4, G1/8, G1/16

domnick hunter Australia



Designed to meet the air purity requirements of AS/NZS1715:1994

SYSTAG-Systems Technology for Air & Gas

112-116 Winston Road
Sheldon Qld 4157

Phone: 07 3206 0408

Fax: 07 3206 0684

Email: mark@systag.com.au

